KS 0.6 µm Au (BG)


KS-050 E08

Item KS-050E08


GO TO PRODUCT

ingun®
Partner for Future Technology

INGUN SELECTION

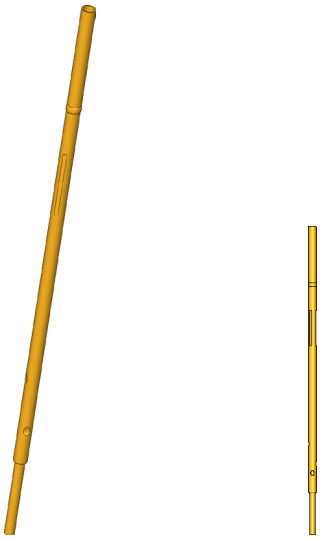

1:1

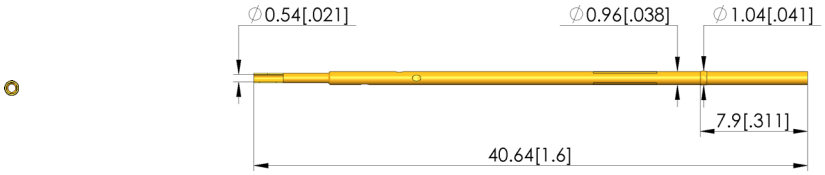

General data

Product group:	Receptacles (KS)
Series:	KS-050
Sub-series:	KS-050 press-in version
Type of receptacle connection:	Plug / open
Press ring:	Yes
Surface area:	Gold
Collar diameter:	1.04 mm [.040 in]
Collar height:	7.9 mm [.311 in]
Knurl:	No
Vacuum-tight:	No
RoHS-compliant:	RoHS-3

Mounting hole

Mounting hole in CEM1:	0.98 - 1.00 mm [.038 - .039 in]
Mounting hole in FR4:	0.98 - 1.00 mm [.038 - .039 in]
Mounting hole with press ring in CEM1:	0.98 - 1.00 mm [.038 - .039 in]
Mounting hole with press ring in FR4:	0.98 - 1.00 mm [.038 - .039 in]

Mechanical data

Total length:	40.6 mm [1.59 in]
Outer diameter:	0.95 mm [.037 in]

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB