
Spring-loaded rotating test probe

DKS-075 217 120 G 2000


Item DKS-075-0002


GO TO PRODUCT

ingun®
Partner for Future Technology

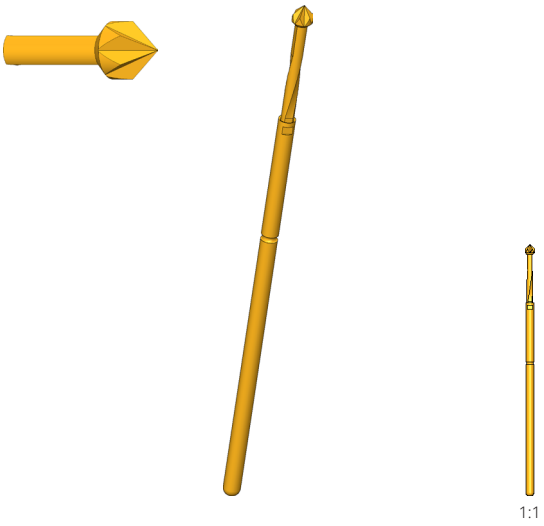

1:1

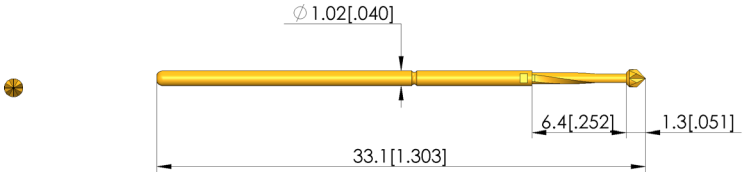



General data

Product group:	ICT / FCT (in-circuit test and function test
Sub-product group:	Rotating test probes
Series:	DKS-075
Grid:	1.91 mm [75 mil]
Contacting from:	Pad, Via, Female connector
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-075
Min. temperature:	- 40 °C [- 104 °F]
Max. temperature:	+ 80 °C [+ 176 °F]
RoHS-compliant:	RoHS-3;6a

Electrical data

Current load capacity / rated current:	3 A
Typical resistance (Ri):	<20 mOhm

Mechanical data

Total length:	33.1 mm [1.30 in]
Barrel diameter:	1.02 mm [.040 in]
Maximum stroke:	6.35 mm [.25 in]
Spring pre-load:	0.74 N [2.66 ozf]
Collar height:	00
Spring force at working stroke:	2 N [7.19 ozf]
Recommended working stroke:	4.3 mm [.169 in]

Tip style data

Tip style:	17 hexagonal pyramid with cutting edges, self-cleaning
Tip diameter:	1.2 mm [.047 in]
Tip style surface:	G aurun
Tip style material:	2 steel

ICT/FCT TEST PROBES


Spring-loaded rotating test probe

DKS-075 217 120 G 2000

Item DKS-075-0002

GO TO PRODUCT

ingun®
Partner for Future Technology

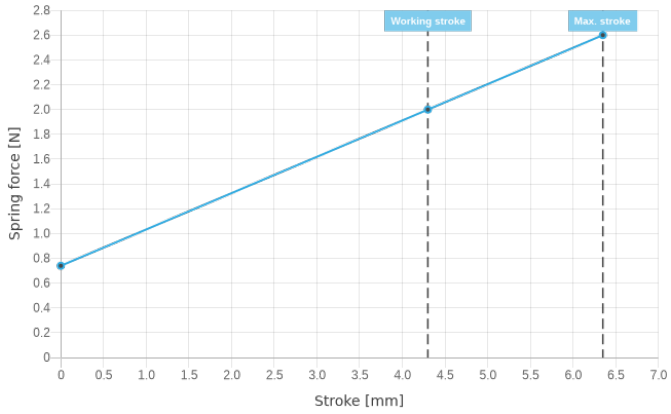

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
ICT/FCT Test probes

ICT/FCT TEST PROBES

Prices and delivery times on request.
Technical changes reserved. 02/25_GB

ingun.com