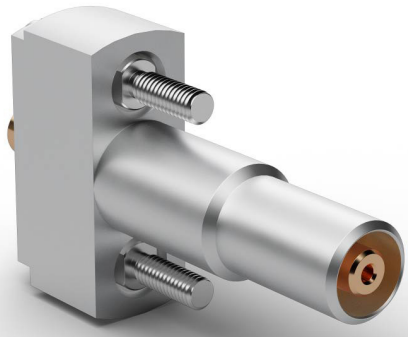


Radio Frequency Probes

HF77-0001BG01-2

Item number 1105444

General

Design	Coaxial Probe
Type/family	HF77
Pitch (mm/mil)	7,5/295
Temperature [C°]	-45°C...+100°C

Electrical specifications

Continuous current (A)	0.50
Impedance (ohm)	50.00
Frequency (GHz)	12.00
Continuous current 2 (A)	0.10

Inner contact specifications

Nominal travel 2 (mm)	0.50
Maximum travel 2 (mm)	1.80
Preload 2 (cN)	95.00
Spring force 2 (cN)	120.00

Mechanical specifications


Preload (cN)	230.00
Spring force (cN)	420.00
Nominal travel (mm)	2.00
Maximum travel (mm)	2.80
Connection type (flux-proof)	Connection Element
DUT	HFM Male 1 Pos

Dimensions

Total length (mm)	31.30
Projection height (mm)	27.00
Tip style diameter (mm)	2.70
Barrel diameter (mm)	4.80
Inside/outside distance (mm)	2.20
Tip style diameter 2 (mm)	0.45

Family drawing

All measurements are in mm.

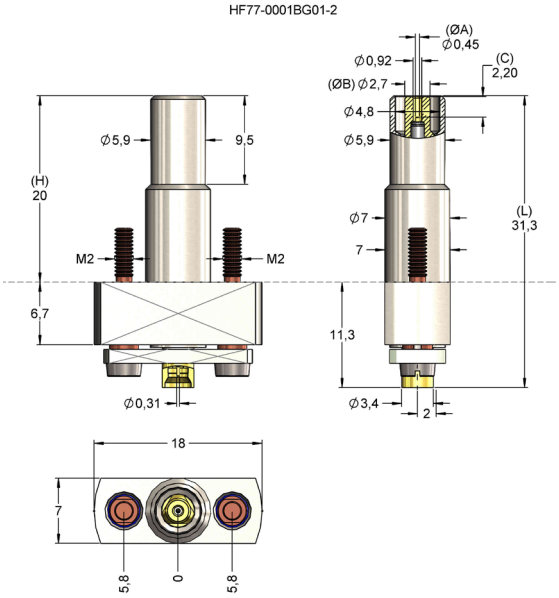

Materials & surfaces

Tip style	50
Tip style 2	16
Tip style material	Beryllium cooper
Tip style plating	Gold
Plunger material	Cooper
Plunger plating	Gold
Barrel material	Brass
Barrel plating	Gold
Spring material	High-grade steel
Spring plating	Uncoated
Plunger material 2	Beryllium cooper
Plunger plating 2	Gold
Spring material 2	Spring steel
Spring plating 2	Gold