Receptacle


KS-002 47 G

Item KS-00247G

GO TO PRODUCT

Partner for Future Technology


INGUN SELECTION





1:1



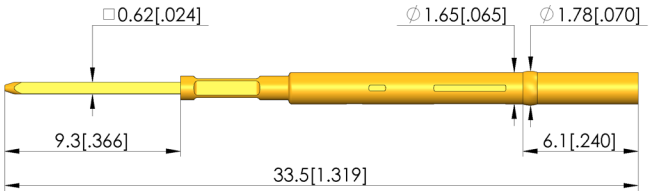

General data

Product group:	Receptacles (KS)
Series:	KS-002
Sub-series:	KS-002 press-in version
Type of receptacle connection:	Wire-wrap
Press ring:	Yes
Surface area:	Gold
Collar diameter:	1.78 mm [.070 in]
Collar height:	6.1 mm [.240 in]
Knurl:	No
Vacuum-tight:	No
RoHS-compliant:	RoHS-3

Mounting hole

Mounting hole in CEM1:	1.68 - 1.69 mm [.066 - .066 in]
Mounting hole in FR4:	1.68 - 1.69 mm [.066 - .066 in]
Mounting hole with press ring in CEM1:	1.70 - 1.75 mm [.066 - .068 in]
Mounting hole with press ring in FR4:	1.70 - 1.75 mm [.066 - .068 in]

Mechanical data

Total length:	33.5 mm [1.31 in]
Outer diameter:	1.67 mm [.065 in]

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB