# 4-pole clamp for batteries


## VKB-635 410 05 N 000 02 06


Item VKB-635-0002


GO TO PRODUCT


ingun®
Partner for Future Technology


UTILITY MODEL | PATENT PENDING | NEW | BATTERY

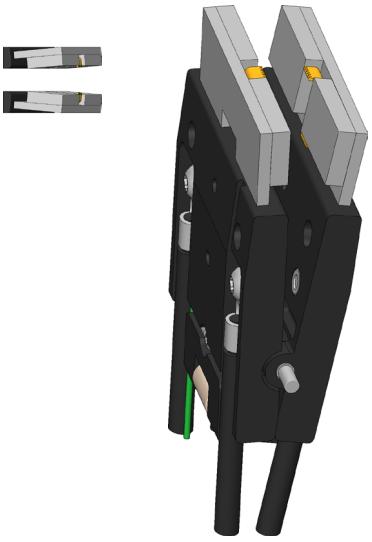


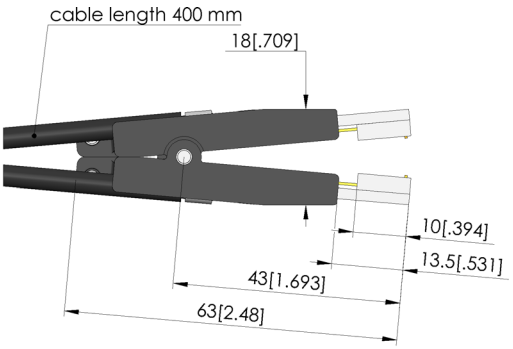
# 4-pole clamp for batteries
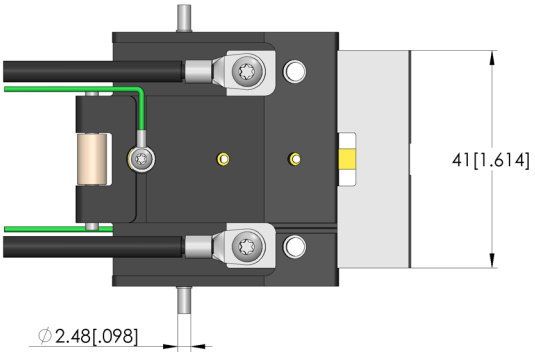
## VKB-635 410 05 N 000 02 06

Item VKB-635-0002

GO TO PRODUCT

Partner for Future Technology

### General data

| | |
|---|---|
| Product group: | High-current test probe |
| Sub-product group: | High-current clamps (flat/round) |
| Series: | VKB-635 |
| Grid: | 30 mm [1181 mil] |
| Contacting from: | Pin, posts, bead, flat contact |
| Magnetic: | Yes |
| Quick-exchange system: | No |
| Type of test probe connection: | vorkonfektioniert |
| Adjustable installation height: | No |
| Non-rotating: | Yes |
| Min. temperature: | - 40 °C [- 104 °F] |
| Max. temperature: | + 80 °C [+ 176 °F] |
| RoHS-compliant: | RoHS-3;6c |

### Electrical data

| | |
|---|---|
| Current load capacity / rated current: | 60 A |
| Typical resistance (Ri): | <1 mOhm |


### Mechanical data

| | |
|---|---|
| Total length: | 63 mm [2.48 in] |


### Tip style data

| | |
|---|---|
| Tip style: | 02 flat |
| Tip style surface: | N nickel |
| Tip style material: | 1 brass |

Current Derating

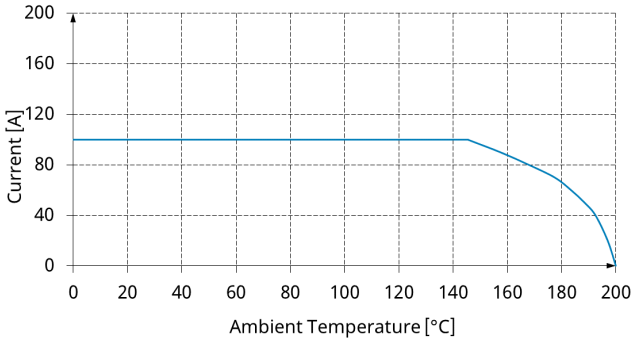


Current Rating

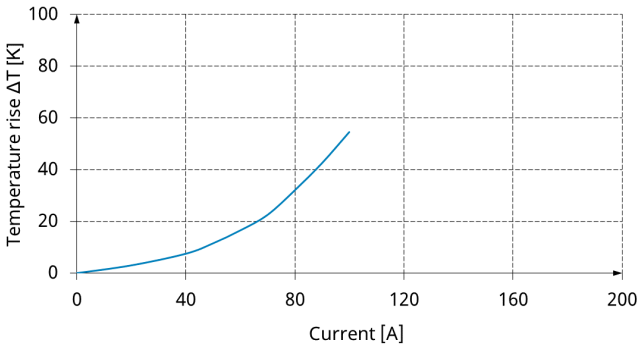


**INGUN Prüfmittelbau GmbH**
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB