Receptacle

KS-003 30 G

Item KS-00330G

GO TO PRODUCT

ingun®
Partner for Future Technology


INGUN SELECTION





1:1



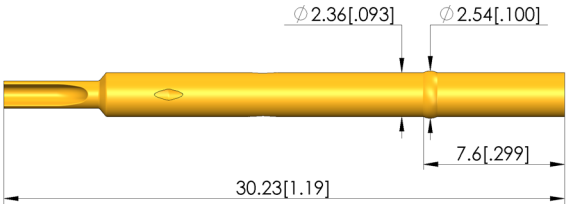

General data

Product group:	Receptacles (KS)
Series:	KS-003
Sub-series:	KS-003 press-in version
Type of receptacle connection:	Solder
Press ring:	Yes
Surface area:	Gold
Collar diameter:	2.49 mm [.098 in]
Collar height:	7.6 mm [.299 in]
Knurl:	No
Vacuum-tight:	No
RoHS-compliant:	RoHS-3

Mounting hole

Mounting hole in CEM1:	2.33 - 2.34 mm [.091 - .092 in]
Mounting hole in FR4:	2.33 - 2.34 mm [.091 - .092 in]
Mounting hole with press ring in CEM1:	2.39 - 2.44 mm [.094 - .096 in]
Mounting hole with press ring in FR4:	2.39 - 2.44 mm [.094 - .096 in]

Mechanical data

Total length:	30.2 mm [1.18 in]
Outer diameter:	2.36 mm [.092 in]

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB