Receptacle


# KS-050 47 E08

Item KS-05047E08


GO TO PRODUCT

Partner for Future Technology

INGUN SELECTION

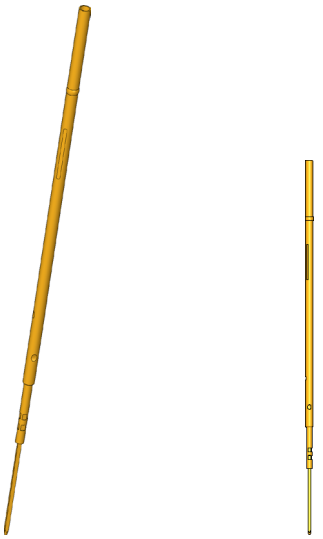

1:1

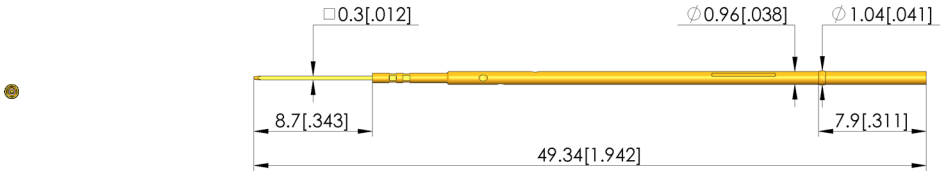


## General data

| | |
|---|---|
| Product group: | Receptacles (KS) |
| Series: | KS-050 |
| Sub-series: | KS-050 press-in version |
| Type of receptacle connection: | Wire-wrap |
| Press ring: | Yes |
| Surface area: | Gold |
| Collar diameter: | 1.04 mm [.040 in] |
| Collar height: | 7.9 mm [.311 in] |
| Wire-wrap post length: | 8.7 mm [.342 in] |
| Knurl: | No |
| Vacuum-tight: | yes (< 1 ccm / min) |
| RoHS-compliant: | RoHS-3 |

## Mounting hole

| | |
|---|---|
| Mounting hole in CEM1: | 0.98 - 1.00 mm [.038 - .039 in] |
| Mounting hole in FR4: | 0.98 - 1.00 mm [.038 - .039 in] |
| Mounting hole with press ring in CEM1: | 0.98 - 1.00 mm [.038 - .039 in] |
| Mounting hole with press ring in FR4: | 0.98 - 1.00 mm [.038 - .039 in] |

## Mechanical data

| | |
|---|---|
| Total length: | 49.3 mm [1.94 in] |
| Outer diameter: | 0.95 mm [.037 in] |

**INGUN Prüfmittelbau GmbH**
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB