
Spring-loaded test probe

GKS-035 207 115 A 1200 LH

Item GKS-035-0034



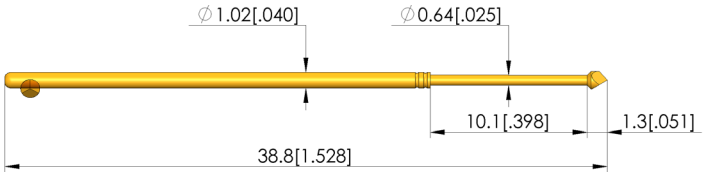

General data

Product group:	ICT / FCT (in-circuit test and function test
Sub-product group:	Long stroke GKS
Series:	GKS-035 LH long version
Grid:	1.91 mm [75 mil]
Contacting from:	Pad, via
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-075
Min. temperature:	- 40 °C [- 104 °F]
Max. temperature:	+ 80 °C [+ 176 °F]
RoHS-compliant:	RoHS-3;6a

Electrical data

Current load capacity / rated current:	
Typical resistance (Ri):	<20 mO

Mechanical data

Total length:	38.8 mm [1.52
Barrel diameter:	1.02 mm [.040
Maximum stroke:	10 mm [.393
Spring pre-load:	0.32 N [1.15
Collar height:	
Spring force at working stroke:	1.2 N [4.31
Recommended working stroke:	8 mm [.314

Tip style data

Tip style:	07 90° 3-edged chisel, self-clean
Tip diameter:	1.15 mm [.045
Tip style surface:	A g
Tip style material:	2 s

ingun.com