
NEW

# Technical Data // 7153-HDMI.A-M-2.0

HDMI Type A - Standard

PTR HARTMANN
A Phoenix Mecano Company



| | |
|---|---|
| **Highlights** | |
| Compatible with all HDMI type A jacks | |
| Durable for high volume production testing | |
| Up to 250.000 cycles | |
| Safe transmission of data rates | |
| **Mechanical Data** | |
| Temperature range | 0 °C - 60 °C |
| Relative Humidity (non-condensing) | 15 % - 95 % |
| Test cycles | 250.000 |
| Mating Force | 45.0 N |
| Unmating Force | 25.0 N |
| RoHS compliant | yes |
| Lead free | yes |
| **Electrical Data** | |
| PWD data | 100.0 Ohm |
| Voltage | 40.0 V AC (rms) |
| Current (power) | 0.5 A |
| Current (signal) | 0.25 A |
| **Test Application** | |
| Device under test (DUT) | HDMI.A-F |
| Gender | female / socket |
| **Accessories** | |
| Article Designation | FU 7153 - HDMI A |


NEW

# Technical Data // 7153-HDMI.A-M-2.0

HDMI Type A - Standard

PTR HARTMANN
A Phoenix Mecano Company

## Technical Drawing Accessorie

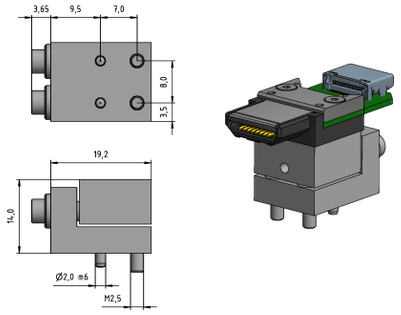


## Technical Drawing

